

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

# (12) UK Patent Application (19) GB (11) 2 374 086 (13) A

(43) Date of A Publication 09.10.2002

(21) Application No 0205118.3

(22) Date of Filing 05.03.2002

(30) Priority Data

(31) 2001084916 (32) 23.03.2001 (33) JP

(71) Applicant(s)

Daido Metal Company Ltd.  
(Incorporated in Japan)  
2 Sanage-cho, Kita-Ku, Nagoya, Japan

(72) Inventor(s)

Kenji Sakai  
Eisaku Inoue  
Satoru Kurimoto  
Koichi Yamamoto  
Takayuki Shibayama

(74) Agent and/or Address for Service

fJ Cleveland  
40-43 Chancery Lane, LONDON, WC2A 1JQ,  
United Kingdom

(51) INT CL<sup>7</sup>

F16C 33/12

(52) UK CL (Edition T)

C7A AB249 AB25Y AB250 AB26X AB261 AB263 AB265  
AB267 AB269 AB27X AB271 AB273 AB275 AB277  
AB279 AB289 AB309 AB319 AB32X AB32Y AB320  
AB349 AB369 AB37Y AB370 AB375 AB377 AB379  
AB38X AB381 AB383 AB385 AB387 AB389 AB399  
AB419 AB42Y AB420 AB422 AB424 AB425 AB427  
AB429 AB43X AB431 AB433 AB435 AB437 AB439  
AB44Y AB440 AB449 AB45X AB451 AB453 AB46Y  
AB460 AB469 AB470 AB473 AB475 AB477 AB479  
AB48X AB481 AB483 AB485 AB487 AB489 AB50Y  
AB500 AB509 AB51X AB511 AB513 AB515 AB517  
AB519 AB52X AB52Y AB528 AB53X AB531 AB533  
AB535 AB537 AB539 AB549 AB559 AB610 AB613  
AB616 AB617 AB62X AB62Y AB621 AB624 AB627  
AB630 AB635 AB66X AB66Y AB661 AB662 AB663  
AB665 AB666 AB667 AB668 AB669 AB670 AB672  
AB675 AB682 AB684 AB686 AB687 AB688 AB70X  
AB702 A71X A713 A747 A748 A757 A759 A782 A783


(56) and (58) continued overleaf

(54) Abstract Title

A sliding material

(57) A sliding material comprising a steel plate and a sintered copper alloy layer bonded to the steel plate. The copper alloy comprises 1.5-15 mass % Sn, 1.5-15 mass % bismuth, 1.5-20 volume % of solid lubricant, optionally 0.03-1 mass % P, not more than 40 mass % in total of Fe, Al, Zn, Mn, Co, Ni and Si, with the balance being copper and incidental impurities. The volume ratio of Bi to solid lubricant is in the range 0.5-2.0. The solid lubricant may be one or more of the following: graphite, BN, MoS<sub>2</sub> and WS<sub>2</sub>. A copper plating layer may lie between the steel plate and the sintered copper alloy layer.

FIG. 1

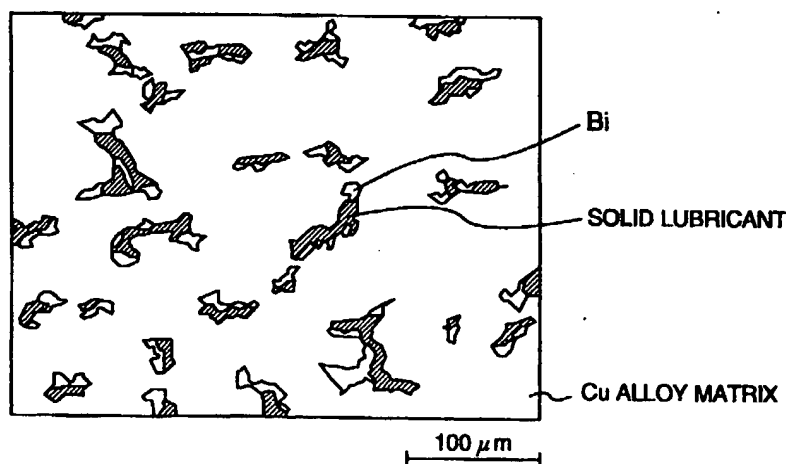

GB 2 374 086 A

**(56) Documents Cited**

**GB 2359822 A**

**GB 2272029 A**

**US 5429876 A**

**GB 2355016 A**

**JP 2001234265 A**

**US 5286444 A**

**(58) Field of Search**

**UK CL (Edition T ) F2A**

**INT CL<sup>7</sup> B22F , C22C , F16C**

**Online: PAJ, WPI**

FIG. 1


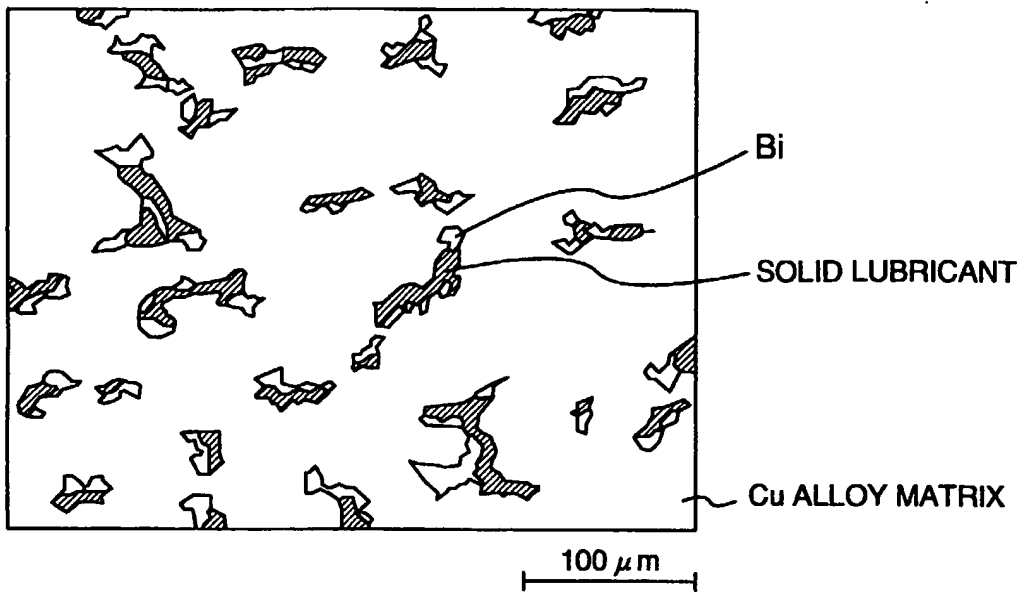


FIG. 2

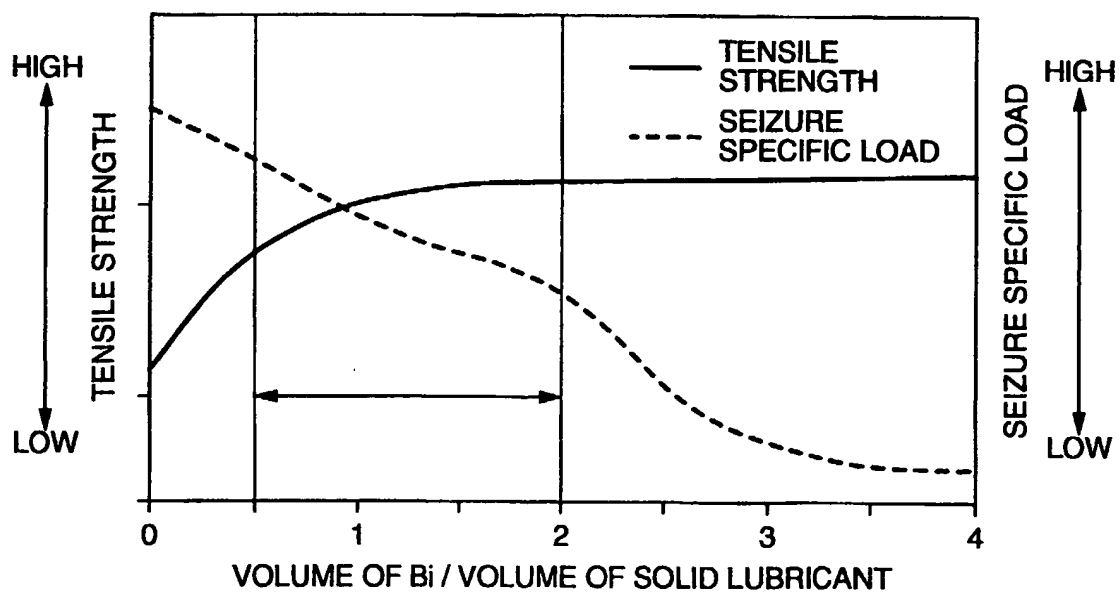

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

The present invention relates to a composite sliding material suitable for bearing materials used in automobiles, agricultural machines, industrial machines and so on.

## 2. Brief description of the art

Composite sliding materials, in which a sintered copper alloy is bonded on a steel plate, have been hitherto used for bearings, bushings, washers, etc. in the fields of automobiles, agricultural machines, industrial machines and so on. The sintered copper alloy is typically a Cu-Sn-Pb (lead bronze) alloy, which exhibits good sliding properties because the Cu alloy matrix supports a load and Pb improves anti-seizure property with a mating member.

The sintered copper alloy has improved anti-seizure property by virtue of additive Pb in bronze. However, it is preferable not to use Pb as far as possible since Pb adversely affects the environment. Thus, Bi is a possible alternative to Pb, but with regard to the anti-seizure property it is not expectable for Bi to have generally the same level effect. There is also a material which is of bronze containing graphite (a solid lubricant). However, it is

inferior in mechanical properties because of lack of Pb as a low melting-point metal to be a liquid phase when sintering.

The present invention has been accomplished  
5 in view of the above background.

An object of the invention is to provide a copper system composite sliding material without Pb having excellent sliding properties equal to or superior to those of the lead-bronze system sintered  
10 copper alloy while having excellent mechanical strength.

#### SUMMARY OF THE INVENTION

The present inventors have found that, in the case where Bi and a solid lubricant are added into  
15 bronze, since Bi melts when sintering because Bi has a melting point as low as Pb, sintering property is improved and good anti-seizure property by virtue of the solid lubricant can be obtained, and that the co-existing solid lubricant and Bi prevent deterioration  
20 of mechanical strength of the bronze containing the solid lubricant and Bi, whereby the present invention has been achieved.

According to one aspect of the invention, there is provided a composite sliding material  
25 comprising a steel plate and a sintered copper alloy layer which is bonded to the steel plate, wherein the copper alloy comprises 1.5 to 15 mass % of Sn, 1.5 to

15 mass % of Bi, 1.5 to 20 volume % of a solid lubricant, and balance of Cu and incidental impurities, and wherein a volume ratio of Bi to the solid lubricant is in a range of 0.5 to 2.0.

5           According to another aspect of the invention, there is provided a composite sliding material comprising a steel plate and a sintered copper alloy layer which is bonded to the steel plate, wherein the copper alloy comprises 1.5 to 15 mass % of Sn, 0.03 to  
10 1 mass % of P, 1.5 to 15 mass % of Bi, 1.5 to 20 volume % of a solid lubricant, and balance of Cu and incidental impurities, and wherein a volume ratio of Bi to the solid lubricant is in a range of 0.5 to 2.0.

          Herein below, there will be provided reasons  
15 why the above components are contained in the copper alloy of the invention composite sliding material in the specific quantities, respectively.

(1) Sn: 1.5 to 15 mass %

          Sn strengthens the Cu matrix of the invention  
20 copper alloy. When the Sn amount is less than 1.5 mass %, the effect of strengthening the Cu matrix can not be obtained. When it exceeds 15 mass %, the Cu matrix becomes brittle because of much formation of a Cu-Sn compound.

25 (2) Bi: 1.5 to 15 mass %

          Bi becomes liquid when sintering and improves sintering property of the copper alloy. Further, Bi improves anti-seizure property and wear resistance of

the copper alloy in an oil lubricating region, and also improves machinability together with the coexisting solid lubricant. When the Bi content is less than 1.5 mass %, the effects on anti-seizure property and wear resistance of the copper alloy can not be attained, and machinability of the copper alloy is deteriorated due to lack of an enough coexistence of Bi and the solid lubricant. When the Bi content exceeds 15 mass %, the copper alloy is deteriorated in strength.

10 (3) Solid lubricant: 1.5 to 20 volume %

The solid lubricant improves anti-seizure property and wear resistance of the copper alloy in the boundary lubrication state or the non-lubrication state. When the content of the solid lubricant is less than 1.5 volume %, the effects of improving anti-seizure property and wear resistance of the copper alloy can not be observed. When the content of the solid lubricant exceeds 20 volume %, the copper alloy is deteriorated in strength and machinability.

20 (4) Volume ratio of Bi to a solid lubricant: 0.5 to 2.0

When the volume ratio of Bi to a solid lubricant (volume of Bi/volume of the solid lubricant) is in a range of 0.5 to 2.0, Bi and the solid lubricant coexist such that the solid lubricant is entrained in Bi, as shown FIG.1. Thus the solid lubricant hardly leaves from the metal structure resulting in improved anti-seizure property and wear resistance. The most preferable volume ratio for coexistence of Bi with the



solid lubricant is approximately 1. When the volume ratio of Bi to the solid lubricant is less than 0.5, the Bi effect is decreased, which is of restraining deterioration of the tensile strength of the copper alloy caused by the solid lubricant. When the ratio exceeds 2.0, the effect of the solid lubricant on anti-seizure property is deteriorated.

The solid lubricant may be one or more substances selected from the group consisting of graphite, BN, MoS<sub>2</sub> and WS<sub>2</sub>. It may be of course any solid lubricant other than the above substances.

(5) P: 0.03 to 1 mass %

P (phosphorous) improves the strength of the Cu matrix. When the P content is less than 0.03 mass %, it is impossible to improve the strength of the Cu matrix. When the P content exceeds 1 mass %, the Cu matrix becomes brittle.

According to one feature of the invention composite sliding material, the copper alloy further comprises not more than 40 mass % in total of one or more elements selected from the group consisting of Fe, Al, Zn, Mn, Co, Ni and Si. These elements dissolve in the Cu matrix to strengthen the Cu matrix. When the content of the element(s) exceeds 40 mass % in total, the hardness of the Cu matrix becomes too high resulting in deterioration of conformability.

According to another feature of the invention composite sliding material, a copper plating layer,

having a thickness of not less than 2  $\mu\text{m}$ , exists between the steel plate and the sintered copper alloy layer. The copper plating layer improves the bonding strength between the sintered copper alloy layer and  
5 the steel plate. When the thickness is less than 2  $\mu\text{m}$ , such effect can not be obtained.

According to still another feature of the invention composite sliding material, the sintered copper alloy has a tensile strength of not less than  
10 200 N/mm<sup>2</sup> thereby restraining deterioration of fatigue resistance thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional view schematically showing the metal structure of embodiments of the  
15 invention sintered copper alloy; and

FIG. 2 is a graph showing the relationship between the volume ratio of Bi to the solid lubricant and the tensile strength and the seizure specific load of the sintered copper alloy.

#### 20 DESCRIPTION OF EMBODIMENTS

Now, there will be described embodiments of the present invention.

First, mixed powders for sintering were prepared, respectively, by mixing a Cu-Sn system copper  
25 alloy powder, a Bi powder and a solid lubricant powder (graphite for the specimens other than Invention

Example 8, and BN for Invention Example 8) in a mixer for about 1 hour for respective Embodiment Examples and Comparative Examples (except Invention Examples 2 and 10 and Comparative Examples 6 and 7) so that the  
5 compositions shown in Table 1 were attained.

With regard to Invention Example 2, a mixed powder for sintering was prepared by mixing a Cu-Sn-P system copper alloy powder, a Bi powder and a solid lubricant powder in a mixer for about 1 hour.

10 With regard to Invention Example 10, a mixed powder for sintering was prepared by mixing a Cu-Sn-Co system copper alloy powder, a Bi powder and a solid lubricant powder in a mixer for about 1 hour as stated above.

15 With regard to Comparative Example 6, a mixed powder for sintering was prepared so as to have substantially the same chemical composition as Invention Example 1 except for a Pb powder alternative to the Bi powder, in which the volume of the Pb powder  
20 was the same as that of the Bi powder in Invention Example 1.

With regard to Comparative Example 7, a mixed powder for sintering was prepared by mixing a Cu-Sn system copper alloy powder and a Pb powder in a mixer  
25 for about 1 hour without using a Bi powder and a solid lubricant powder.

A combination of the Cu-Sn system copper alloy powder and the Bi powder mentioned above may be

replaced by a Cu-Sn-Bi alloy powder.

The thus prepared mixed powders for sintering, except for Invention Example 2, respectively, was uniformly spread on a steel plate having a thickness of 1.3 mm, and heated to 750 to 900°C in a reduction atmosphere to conduct a first sintering treatment. Thereafter, the prepared entirety was subjected to rolling followed by second sintering under the same conditions as the first sintering. Subsequently, the intermediate product was again subjected to rolling (final rolling) to obtain a composite sliding material as a bimetal. It should be noted that Invention Example 9 was not subjected to the final rolling.

15               With regard to Invention Example 2, such a mixed powder for sintering as stated above was uniformly spread on a steel plate having a thickness of 1.3 mm and provided with a copper plating of 3  $\mu$ m thickness, and the thus prepared combination of materials was subjected to a first sintering, rolling, and a second sintering followed by a final rolling to obtain a composite sliding material as a bimetal.

The thus produced composite sliding materials were machined to produce plain bearings each having a thickness of 1.5 mm, and the plain bearings were subjected to a seizure test and a wear test. Half shell bearings having a thickness of 1.5 mm were also produced and subjected to a fatigue test. Further, in

order to confirm the tensile strength of the sintered copper alloy layer of the respective composite sliding material, the steel plate (back steel) was removed from the material and a tensile test was conducted. A shear  
5 test was also conducted in order to confirm the bonding strength between the sintered copper alloy layer and the steel back plate of the respective composite sliding materials.

In the seizure test, the mating member driven  
10 to rotate by a motor was forced to slide on the respective plain bearing in such a manner that the testing load was increased step-by-step from an initial bearing load wherein  $3 \text{ N/mm}^2$  was accumulated at every increase of load while the load at each step was held  
15 for 30 minutes. When the temperature of backside surface of the plain bearing exceeds  $200^\circ\text{C}$  or the driving current of the motor driving the mating member exceeds a predetermined value, the bearing load at that time was determined to be a seizure specific load.

20 In the wear test, the mating member driven by a motor was caused to slide on the respective plain bearing under a constant load, and the wear amount was measured after a test period of time.

In the fatigue test, a constant load was  
25 exerted on the respective half shell bearing and, after the test, the bearing alloy was observed whether fatigue was occurred. The conditions for the wear and fatigue tests are shown in following Tables 3 and 4.

Table 1

	No	Chemical composition of copper-base sintered alloy						Volume of Bi/ Volume of solid lubricant	Cu Plating	Final rolling	Bonding shear strength (N/mm <sup>2</sup> )	Tensile strength (N/mm <sup>2</sup> )	Seizure specific load (MPa)	Wear amount (μm)	Occurrence of Fatigue
		Cu mass%	Sn mass%	Bi mass%	P mass%	Others mass%	Solid lubricant (vol%)								
Invention Example	1	Bal.	10	5	-	-	Gr : 5	0.9	No	Yes	162	255	24	8	No
	2	Bal.	10	5	0.2	-	Gr : 5	0.9	Yes	Yes	171	286	21	6	No
	3	Bal.	10	5	-	-	Gr : 8	0.5	No	Yes	148	225	27	6	No
	4	Bal.	10	13	-	-	Gr : 6	1.9	No	Yes	121	236	30	9	No
	5	Bal.	10	13	-	-	Gr : 18	0.6	No	Yes	101	208	30	6	No
	6	Bal.	10	2	-	-	Gr : 2	0.9	No	Yes	178	312	18	14	No
	7	Bal.	2	5	-	-	Gr : 5	0.9	No	Yes	134	204	24	16	No
	8	Bal.	10	5	-	-	BN : 5	0.9	No	Yes	164	260	21	10	No
	9	Bal.	10	5	-	-	Gr : 5	0.9	No	No	132	206	24	18	No
	10	Bal.	10	5	-	Co:5	Gr : 5	0.9	No	Yes	162	273	24	6	No
	11	Bal.	10	5	-	-	Gr : 5	0.9	Yes	Yes	173	253	24	8	No
Comparative Example	1	Bal.	0.5	5	-	-	Gr : 5	0.9	No	Yes	101	187	24	20	Yes
	2	Bal.	10	1	-	-	Gr : 12	0.7	No	Yes	156	326	12	24	No
	3	Bal.	10	18	-	-	Gr : 23	0.7	No	Yes	87	168	30	10	Yes
	4	Bal.	10	5	-	-	Gr : 15	0.3	No	Yes	122	188	27	8	Yes
	5	Bal.	10	8	-	-	Gr : 3	2.3	No	Yes	138	254	15	20	No
	6	Bal.	10	-	-	Pb:6	Gr : 5	-	No	Yes	165	263	24	12	No
	7	Bal.	10	-	-	Pb:10	-	-	No	Yes	175	260	24	8	No

Table 2

(Conditions of seizure test)

ITEM	CONDITIONS
Peripheral speed	2.0 m/sec
Lubricating oil	SAE#30
Amount of feeding oil	20 ml/minute
Material of mating member	JIS S55C as quenched
Roughness of mating member	$R_{\max}$ : not more than 1.0 $\mu\text{m}$

Table 3

(Conditions of wear test)

ITEM	CONDITIONS
Peripheral speed	0.01 m/sec
Specific load	10 MPa
Lubricating oil	SAE#10
Feeding oil	in oil bath
Test period of time	4 hours
Material of mating member	JIS S55C as quenched
Roughness of mating member	$R_{\max}$ : not more than 1.0 $\mu\text{m}$

Table 4

(Conditions of fatigue test)

ITEM	CONDITIONS
Specific load	110 MPa
Test period of time	20 hours
Speed	9 m/sec
Lubricating oil	SAE#30
Feeding oil pressure	0.49 MPa
Test temperature	100°C
Material of mating member	JIS S55C as quenched
Roughness of mating member	$R_{\max}$ : not more than 1.0 $\mu\text{m}$

The following is an analysis of the test results.

General evaluation

Comparative Example 7 corresponds to a  
5 conventional lead bronze alloy. Invention Examples 1  
to 10 exhibit excellent properties of anti-seizure,  
wear resistance, and fatigue resistance equal to or  
superior to Comparative Example 7. Therefore, it can  
be understood that the additive Bi and solid lubricant  
10 contributes to the copper system composite sliding  
material of the Invention Examples without Pb to have  
excellent sliding properties equal to or superior to  
the sintered Cu-Sn-Pb system alloy.

Effect of Sn

15 Invention Example 1 has substantially the  
same chemical composition as Comparative Example 1  
except for the Sn content different to each other.  
Comparative Example 1 containing a smaller amount of Sn  
has low tensile strength and inferior fatigue  
20 resistance. From this, it can be understood that high  
strength and excellent fatigue resistance cannot be  
attained if the Sn content is smaller.

Effect of Bi and Solid lubricant

(1) Content

25 Bi and the solid lubricant influence wear  
resistance and fatigue resistance of the copper alloy.  
Comparing Invention Example 1 with Comparative Example  
2, the latter having smaller contents of Bi and the



solid lubricant is inferior to Invention Example 1 in anti-seizure property and wear resistance. Further, comparing Invention Example 1 with Comparative Example 3, the latter having larger contents of Bi and the  
5 solid lubricant is inferior to Invention Example 1 in wear resistance and fatigue resistance. As can be seen from the above, larger or smaller contents of Bi and the solid lubricant deteriorate the copper alloy in anti-seizure property, wear resistance and fatigue  
10 resistance.

(2) Volume ratio

Comparing Invention Example 1 with Comparative Example 4, the latter having a smaller volume ratio of Bi to the solid lubricant (Volume of  
15 Bi/Volume of the solid lubricant) has low tensile strength and inferior fatigue resistance. Further, comparing Invention Example 1 with Comparative Example 5, the latter having a larger volume ratio of Bi to the solid lubricant is equal to the former in tensile  
20 strength and fatigue resistance but inferior to the former in anti-seizure property and wear resistance.

As can be seen from the above, the volume ratio of Bi to the solid lubricant influences tensile strength, anti-seizure property, wear resistance, and  
25 fatigue resistance of the copper alloy. FIG. 2 shows results of the tensile test and the seizure test carried out with various volume ratios of Bi to the solid lubricant in the copper alloy adjusted to contain

10 mass % of Sn and 10 volume % in total of Bi and the solid lubricant. It can be seen from the drawing that the tensile strength is inferior when the volume ratio is less than 0.5 and the anti-seizure property is  
5 remarkably deteriorated when the volume ratio exceeds 2. Therefore, the volume ratio of Bi to the solid lubricant is preferably in a range of 0.5 to 2.0.

(3) Function of Bi and solid lubricant

As stated above, the contents of Bi and the  
10 solid lubricant and the volume ratio therebetween influence sliding properties of the copper alloy. Since Bi is a low melting point metal like as Pb, it becomes liquid when sintering and enters into interfacial regions of particles of the copper alloy  
15 powder to promote sintering of the copper alloy powder. At that time, liquidus Bi is absorbed in the solid lubricant, whereby Bi is prevented to flow out from the sintering powder resulting in that Bi effectively contributes to bonding of particles of the copper alloy  
20 powder. A good sintering property is attained by the above action of Bi and the solid lubricant. It is also noted that, even in the case of the Cu-Sn-Bi system alloy, Bi melts and flows out from the alloy and enter into interfacial regions of particles of the copper  
25 alloy powder during sintering.

FIG. 1 schematically shows the metal structure of embodiments of the invention copper alloy, in which the Bi phase is present at grain boundaries of

the Cu matrix. Further, there can be seen the structural feature of the invention sintered copper alloy in FIG. 1, according to which the solid lubricant is entrained in the Bi phase. In the case where the  
5 volume ratio of Bi to the solid lubricant is determined to be in a range of 0.5 to 2.0, there can be obtained such a metal structure that the solid lubricant is entrained in the Bi phase. For obtaining the metal structure, most preferably the volume ratio of Bi to  
10 the solid lubricant is around 1.

The solid lubricant improves anti-seizure property of the copper alloy by virtue of its inherent characteristics. However, if the solid lubricant is present separately among particles of a copper alloy  
15 powder, it acts as if there are mere vacancies in the copper alloy powder resulting in deteriorated strength of the copper alloy, and easily leaves from existing positions among alloy particles during slide-contacting with a mating member.

20 However, according to the present invention, since the solid lubricant is entrained in the Bi phase as stated above, it is possible to prevent deterioration of the copper alloy in strength, and the solid lubricant does not easily leave from existing positions  
25 among alloy particles during slide-contacting with a mating member. According to the present invention, by virtue of the same reason mentioned above, there can be also obtained advantages that the solid lubricant

prevents Bi to excessively flow toward the sliding surface of the copper alloy under an elevated high temperature due to a sliding movement relative to the mating member resulting in excellent wear resistance.

- 5 Thus, the invention sintered copper alloy exhibits excellent performance by virtue of the above mutual relationship between Bi and the solid lubricant.

Bi also contributes to improvement of wear resistance of the copper alloy. Comparing Invention  
10 Example 1 with Comparative Example 6 which contains Pb instead of Bi, the latter exhibits a larger wear amount than the former. From this, it can be confirmed that Bi contributes to improvement of wear resistance of the copper alloy as compared with Pb.

15 Copper plating

When a copper plating exists between the steel plate and the sintered copper alloy layer, as will be apparent from the comparison between Invention Example 11 with the copper plating layer and Invention  
20 Example 1 with no copper plating layer, the former has greater bonding shear strength than the latter.

P and Co

P and Co contribute to improvement of tensile strength of the copper alloy, respectively. Invention  
25 Example 2 containing P and Invention Example 10 containing Co show a greater tensile strength than Invention Example 1 containing none of P and Co.

Further, comparing Invention Example 1

subjected to final rolling and Invention Example 9 not subjected to final rolling with regard to the tensile strength, the former shows a greater tensile strength than the latter, so that it is also expectable to  
5 improve tensile strength with work-hardening caused by final rolling.

As will be apparent from the above, according to the invention, the copper system composite sliding material without Pb can be provided, which has  
10 excellent sliding properties equal to or superior to those of the lead-bronze system sintered copper alloy and is excellent in mechanical strength.

CLAIMS:

1. A composite sliding material comprising a steel plate and a sintered copper alloy layer which is bonded to the steel plate, wherein the copper alloy consists essentially of 1.5 to 15 mass % of Sn, 1.5 to 15 mass % of Bi, 1.5 to 20 volume % of a solid lubricant, optionally not more than 40 mass % in total of one or more elements selected from the group consisting of Fe, Al, Zn, Mn, Co, Ni and Si, and balance of Cu and incidental impurities, and wherein a volume ratio of Bi to the solid lubricant is in a range of 0.5 to 2.0.
2. A composite sliding material according to claim 1, wherein the solid lubricant is one or more substances selected from the group consisting of graphite, BN, MoS<sub>2</sub> and WS<sub>2</sub>.
3. A composite sliding material according to any one of claim 1 or 2, wherein a copper plating layer, having a thickness of not less than 2  $\mu\text{m}$ , exists between the steel plate and the sintered copper alloy layer.
4. A composite sliding material according to any one of claims 1 to 3, wherein the sintered copper alloy layer has a tensile strength of not less than 200 N/mm<sup>2</sup>.
5. A composite sliding material comprising a steel plate and a sintered copper alloy layer which is bonded to the steel plate, wherein the copper alloy consists essentially of 1.5 to 15 mass % of Sn, 0.03 to

1 mass % of P, 1.5 to 15 mass % of Bi, 1.5 to 20 volume % of a solid lubricant, optionally not more than 40 mass % in total of one or more elements selected from the group consisting of Fe, Al, Zn, Mn, Co, Ni and Si, and balance of Cu and incidental impurities, and wherein a volume ratio of Bi to the solid lubricant is in a range of 0.5 to 2.0.

6. A composite sliding material according to claim 5, wherein the solid lubricant is one or more substances selected from the group consisting of graphite, BN, MoS<sub>2</sub>, and WS<sub>2</sub>.

7. A composite sliding material according to any one of claim 5 or 6, wherein a copper plating layer, having a thickness of not less than 2  $\mu\text{m}$ , exists between the steel plate and the sintered copper alloy layer.

8. A composite sliding material according to any one of claims 5 to 7, wherein the sintered copper alloy layer has a tensile strength of not less than 200 N/mm<sup>2</sup>.

9. A composite sliding material substantially as hereinbefore described with reference to and as shown in the accompanying drawings.



Application No: GB 0205118.3  
Claims searched: 1-9

Examiner: Matthew Lawson  
Date of search: 26 July 2002

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.T): F2A

Int Cl (Ed.7): B22F; C22C; F16C

Other: Online: PAJ, WPI

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X,P	GB 2359822 A (DAIDO) - pub. 05.09.01 - page 4 lines 20-23, page 6 lines 21-23, page 7 lines 4-5, page 10 lines 11-13 and Inventive Example 6 of Table 1.	1,3-5,7,8
X,P	GB 2355016 A (DAIDO) - pub. 11.04.01 - page 3 lines 4-11, page 5 lines 22-24, page 7 lines 12-18, page 8 lines 19-23 & 26-27 and figure 1A.	1,3-5,7,8
A	GB 2272029 A (DAIDO) - claims 1, 3 & 4.	
A,P	JP 2001234265 A (TEIKOKU) - pub. 28-08-01 - WPI Abstract Accession No. 02-085408/12 and the PAJ abstract	
X	US 5429876 (TANAKA) - column 1 lines 50-58 and column 1 line 63 - column 2 line 2.	1,3-5,7,8
X	US 5286444 (TOMIKAWA) - column 1 lines 6-8, column 2 lines 24-31 & alloy D of Table 1.	1,4

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



PAT-NO: GB002374086A

DOCUMENT-IDENTIFIER: GB 2374086 A

TITLE: A sliding material

PUBN-DATE: October 9, 2002

INVENTOR-INFORMATION:

NAME	COUNTRY
SAKAI, KENJI	JP
INOUE, EISAKU	JP
KURIMOTO, SATORU	JP
YAMAMOTO, KOICHI	JP
SHIBAYAMA, TAKAYUKI	JP

ASSIGNEE-INFORMATION:

NAME	COUNTRY
DAIDO METAL CO	JP

APPL-NO: GB00205118

APPL-DATE: March 5, 2002

PRIORITY-DATA: JP2001084916A (March 23, 2001)

INT-CL (IPC): F16C033/12

EUR-CL (EPC): F16C033/12